


POLATIS® SERIES 6000i

Instrument Optical Matrix Switch

Single-mode instrument optical switch from 8×8 to 192×192 ports



Series 6000i Ultra 32×32 Optical Switch

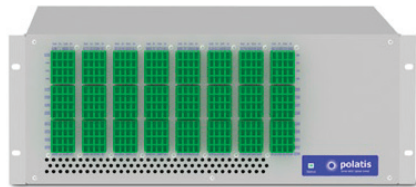

Series 6000i 192×192 Optical Switch

The POLATIS Series 6000i Instrument optical switch is a high-performance, fully non-blocking all-optical matrix switch available in sizes from 8×8 up to 192×192. It is designed to meet the highest performance needs of the most demanding test and measurement applications with exceptionally low optical loss, superior connection stability and repeatability in a compact form factor. With support for Software-Defined Networks (SDNs) via embedded NETCONF and RESTCONF control interfaces, the Series 6000i interfaces directly with cutting edge cloud-based network and infrastructure testing applications. It is also used extensively by major network equipment manufacturers to automate testing of optical components and subsystems. Its exceptionally low optical loss and low latency also make it particularly suitable for Quantum Networking and QKD.

KEY FEATURES

- Non-blocking matrix switch sizes from 8×8 to 192×192
- Available in symmetric N×N and N×CC any-to-any port configurations; asymmetric M×N configurations on request
- Fully bidirectional optics
- Protocol and bit-rate agnostic up to 400 Gbs and beyond
- Switch and hold dark fiber connections
- SDN enabled with NETCONF and RESTCONF command interfaces
- Carrier-class interfaces with SNMP, TL1 and SCPI control languages
- Built-in user-friendly secure web GUI interface
- Supports RADIUS secure user access protocols
- Optional Optical Power Monitoring (OPMs) with user configurable optical power alarms
- Optional Variable Optical Attenuation (VOA) on every switch connection
- Exceptional optical stability and repeatability
- Programmable port shutter for fiber break simulation
- High reliability distributed architecture
- Eco-friendly low power consumption
- Dual redundant power

DirectLight® technology

POLATIS Series 6000i switches use POLATIS patented, highly reliable piezoelectric DirectLight® beam-steering technology that sets the industry standard for lowest optical loss and highest optical performance. POLATIS DirectLight® technology allows true dark fiber switching where the connections can be made and held without light being present on the fiber. This allows operators to pre-provision paths, as well as switch intermittent and variable-power test signals, over lit or dark fiber.

SDN enabled with user friendly interfaces

POLATIS offers a full complement of Software Defined Networking (SDN) interfaces including NETCONF and RESTCONF, enabling infrastructure vendors and system test operators to dynamically and cost effectively setup, monitor and operate cloud-based test configurations. In addition, POLATIS also offers SNMP, TL1, and SCPI command languages that allow for seamless integration with test equipment controllers. Each switch also has a user-friendly secure web browser GUI interface that can be used to provision, monitor, and control the switch.

Switch matrix size options

The POLATIS Series 6000i switch is available in matrix sizes from 8×8 to

192×192 in symmetric (N×N) and single-sided customer-configurable (N×CC) switch matrices, to meet a broad range of test and measurement applications. Asymmetric (M×N) configurations are available on request. Switch sizes up to 32×32 can be accommodated in a 1 RU chassis.

Integrated features for test lab applications

POLATIS Series 6000i switches include options for integrated Optical Power Monitors (OPMs) on every connection. These are ideal for identifying signal degradation or loss and can be used to provide Variable Optical Attenuation (VOA) on every connection to protect sensitive equipment from higher power levels. POLATIS Series 6000i switches have a unique user-programmable shutter function that can be used to simulate single or repeated fiber breaks on any number of switch connections for network stress testing. Switches can also be partitioned in software to enable multiple test teams to use the same switch without risk of conflict

POLATIS 6000i Ultra

POLATIS 6000i Series switches up to 96×96 matrix size are designated "Ultra" owing to their ultra-high optical performance with <1.0 dB maximum insertion loss on sizes up to 32×32 and <1.2 dB maximum on sizes up to 96×96.

BENEFITS OF POLATIS SWITCHING

- Low optical loss minimizes impact on equipment and system optical power budgets
- Exceptional stability and repeatability increase measurement consistency, accuracy and precision
- NETCONF and RESTCONF SDN interfaces communicate directly to cloud-based manufacturing and network test configurations.
- Signal format, wavelength, direction and bitrate independence with minimal signal impairment provides truly transparent connections
- Remote operation and fast switching times speed up and simplify testbed setup and reconfiguration
- Dark fiber switching enables pre-provisioning and use with intermittent signals or variable power signals
- Low power usage and compact physical size fits into applications other switches cannot
- Interoperates with popular third-party test software

APPLICATIONS

- Network and data center SIT lab test applications
- Centralized test equipment sharing and automated network testing
- Component, transponder, line card and subsystem testing
- Automated regression testing for new product releases
- Lab as a Service (LaaS) and Test as a Service (Taas) automation and orchestration
- Cloud-based SDN test configurations
- Satellite uplink and RFoF testing
- PON and FTTx system testbeds
- Quantum technology test beds
- QKD

For installation and technical support

Technical support: +1 844 POLATIS (765.2847)

For sales inquiries

Sales support: +1 844 POLATIS (765.2847)

HUBER+SUHNER

North American Headquarters

HUBER+SUHNER Polatis
213 Burlington Road
Suite 123
Bedford, MA 01730
U.S.A.
For all enquiries:
+1 781 275 5080 phone
+1 844 POLATIS toll free
+1 781 275 5081 facsimile
info.polatis@hubersuhner.com

European Headquarters

HUBER+SUHNER Polatis Ltd.
332/2 Cambridge
Science Park
Cambridge CB4 0WN
United Kingdom
For all enquiries:
+44 1223 424200 phone
+44 1223 472015 facsimile
info.polatis@hubersuhner.com

Follow us on Twitter @polatisnetworks

Copyright © 2022 HUBER+SUHNER Polatis. All rights reserved.
All information in this document is provided for informational purposes only and is subject to change without notice.
HUBER+SUHNER Polatis assumes no liability for actions taken based on information contained herein.

www.polatis.com

Rev. 60001.022022.001

POLATIS 6000i

Performance Parameters	6000i-Ultra	6000i-Ultra	6000i
Matrix Switch Sizes (NxN) ¹	8x8 to 32x32	48x48 to 96x96	144x144 to 192x192
Typical Insertion Loss ²	0.5 dB	0.6 dB	0.9 dB
Maximum Insertion Loss ²	1.0 dB	1.2 dB	1.9 dB
Maximum Insertion Loss with single OPM ²	1.3 dB	1.5 dB	2.2 dB
Loss Repeatability ³	+/-0.05 dB	+/-0.05 dB	+/-0.1 dB
Connection Stability ³	+/-0.05 dB	+/-0.05 dB	+/-0.1 dB
For all switch sizes			
Operating Wavelength Range	1260-1675 nm		
Return Loss (with APC connectors)	>50 dB		
Max Switching Time	25 ms		
Data Latency through a switch connection	25 ns		
Dark Fiber Switching	Yes		
Bi-Direction Optics	Yes		
Wavelength Dependent Loss (WDL)	<0.3 dB (C+L Band)		
Polarization Dependent Loss (PDL)	<0.1 dB (C+L Bands)		
	<0.3 dB with optional OPM (C+L Band)		
Crosstalk	<-55 dB		
Optical Input Power Range	Dark to +24 dBm		
Optional Optical Power Monitoring (OPM)	Calibrated wavelength range 1290-1330 nm and 1450-1640 nm Dynamic range -40 dBm to +22 dBm Accuracy +/-0.5 dBm		
Switch Lifetime	>10 ⁹ Cycles		
Operating Temperature	+5 °C to +40 °C <85 % RH non-condensing		
Storage Temperature	-40 °C to +70 °C <40 % RH non-condensing		

Electrical and Mechanical

Electrical and Mechanical	POLATIS 6000i Specifications
Fiber Type	Single-mode
Single Fiber Connector Types	LC or LC-HD, SC, FC and E-2000 Connectors Angled (APC) or Ultra (UPC) connector types available
Array Connector Types	MTP-8 or MTP-12 Elite Array Connectors
Control Languages	NETCONF, RESTCONF, SNMP, TLI, SCPI & Secure User-Friendly Web GUI
User Interfaces	Dual Gigabit Ethernet
Craft Interface	RS232 Serial and USB
Secure User Access Protocols	RADIUS AAA (EAP-TTLS, PAP)
Power options	Hot-Swap Dual Redundant 100-240 VAC 50/60 Hz Hot-Swap Dual Redundant -48 VDC
Power Consumption	25-75W

Switch Chassis Height^{4,5}

	6000i	6000i	6000i
	Matrix Size	Matrix Size	Matrix Size
Fiber Connector	up to 48x48	up to 144x144	up to 192x192
MTP or LC-HD (High Density LC)	1RU	3RU	4RU
LC	2RU	4RU	6RU
SC or E-2000	3RU	6RU	8RU

All parameters are measured excluding connectors at 1550 nm and 20 °C with an unpolarized source after thermal equalization unless otherwise noted.

1. Single-sided NxCC customer-configurable switches with any-to-any port connectivity are also available. Asymmetric MxN switches on request.

2. Measured using the 3 patch-cord method as defined in ANSI/TIA/EIA-526-7-1998

3. Stability and repeatability are measured at maximum transmission

4. The switch chassis width is 19" and the depth is 22" for all Series 6000 switches

5. Series 6000 switches with optional optical power meters may have larger switch chassis height